Feron.PRO
EUROPE GROUP

10+YEARS experience

INDEPENDENT INNOVATION
LED LIGHTING MANUFACTURER

Responsibility, Honesty, Service and Value.
Listed Company
Quality Defender

©2010-2021ShineLong Technology. All rights reserved.

Feron.PRO

¡Marca que ha pasado la prueba del tiempo!

Los productos Feron se fabrican desde 1999. Durante este tiempo, hemos tomado la posición de liderazgo en el campo de la iluminación LED de calidad. Hemos ampliado significativamente la gama de productos con los productos más modernos y demandados para resolver problemas en el campo de la iluminación profesional y doméstica.

Surtido

Hoy, Feron produce más de 2500 artículos de iluminación en las siguientes áreas:
- Fuentes de luz
- Luminarias: domésticas, industriales, de oficina, exteriores, autónomas
- Iluminación decorativa
- Electrotécnica y accesorios

Calidad

Amplia experiencia profesional de nuestros empleados y nuestro propio laboratorio, equipado con los últimos equipos, permiten llevar a cabo una investigación de alta calidad de cualquier producto LED y lleve a cabo un control de calidad entrante de los productos.

Servicio

Su manager personal siempre les ayudará a organizar las ventas al más alto nivel, asesorar sobre el producto, notificar sobre descuentos y promociones, notificar con anticipación sobre la llegada de nuevos productos. Ofrecemos a nuestros clientes soporte publicitario y de marketing.

Programa de afiliación

Ofrecemos cooperación a largo plazo en condiciones favorables, programas de comerciantes y de distribución.

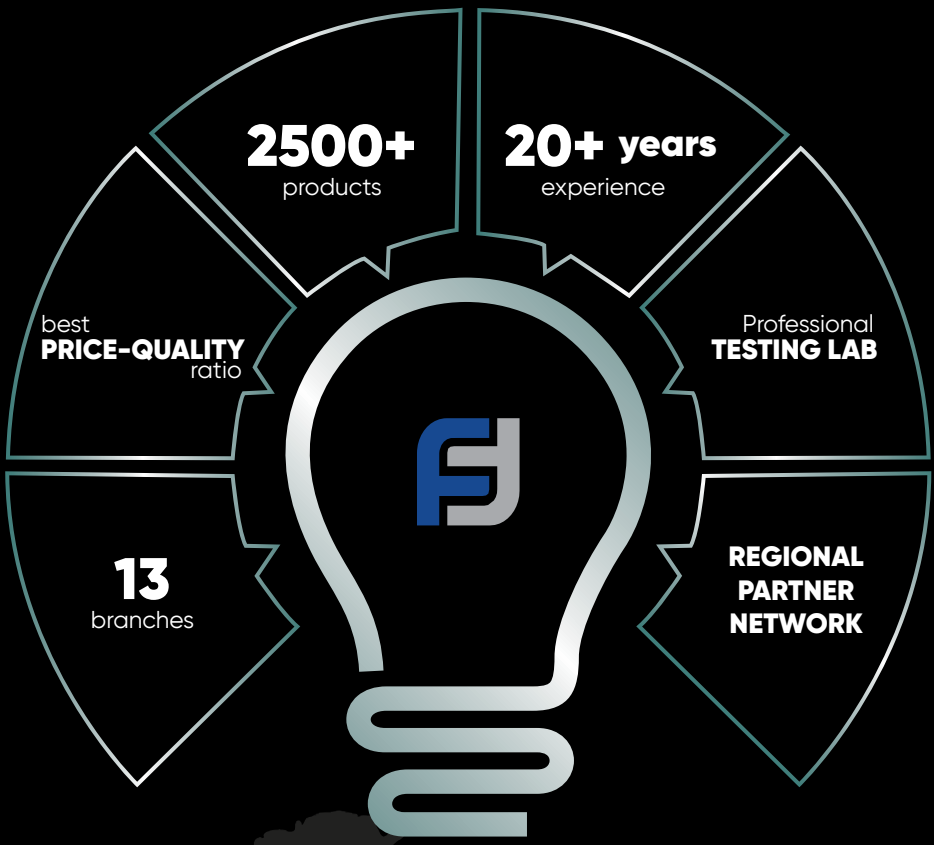
2500+
products
20+ years
experience
best
PRICE-QUALITY
ratio
Professional
TESTING LAB
13
branches
REGIONAL
PARTNER
NETWORK

Feron.PRO

Índice

Quotation Sheet - EcoMini PC Tri-proof Light ..... pág 4

Quotation Sheet - Gauls IP68 Tri-proof Light for EU&AU ..... pág 6

Quotation Sheet - Rancher IP69K Tri-proof Light for EU&AU ..... pág 8

Quotation Sheet - K-lens Linkable Linear Light for EU&AU ..... pág 10

Quotation Sheet - LED Linear Light for EU&AU ..... pág 12

Quotation Sheet - Parkade AL Tri-proof Light for EU&AU ..... pág 14

Quotation Sheet - LED Slim Bay Light ..... pág 16

Quotation Sheet - LED Security Light for EU ..... pág 18

Eco Mini

Waterproof LED Light

Linkable/tool-free
Cost-effective
Full PC housing, S304 clips
Anti-yellow / Non-Cracking

SL-M65X2-20-X

20 Watts 600*70*61mm/2Ft

110~120lm/w	2200~2400lm
120~130lm/w	2400~2600lm

SL-M65X4-30-X

30 Watts 1200*70*61mm/4Ft

110~120lm/w	3300~3600lm
120~130lm/w	3600~3900lm

SL-M65X5-40-X

40 Watts 1500*70*61mm/5Ft

110~120lm/w	4400~4800lm
120~130lm/w	4800~5200lm

CE RoHS

Quotation Sheet - EcoMini PC Tri-proof Light

Features and Advantages:

* CE, RoHS Certified
* IP65 waterproof, IK09 protaction
* Linkable, Cost-effective
* No dark area, No sulfur seal, Anti-yellow, Non-cracking
* Material: Full PC housing (Frosted cover) with S304 clips
* High Efficacy: 110lm/w ±5%, up to 130lm/w
* High CRI: Ra>80, SDCM<4
* Flicker free internal driver
* Input Voltage: AC200-240V 50/60Hz
* High Power factor: >0.95
* L80B10(Ta=25°C)>50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending & Ceiling mounted for convenient installation and maintenance
* Application: Parking place / Warehouse / Railway Station / Corridor / Gallery

Item Number	SL-M65X2-20-X	SL-M65X4-30-X	SL-M65X5-40-X
Description	0.6m 20watts, 2200~2400lm Dimension: 600*70*61mm LED Q'ty: 156pcs SMD2835	1.2m 30watts, 3300~3600lm Dimension: 1200*70*61mm LED Q'ty: 260pcs SMD2835	1.5m 40watts, 4400~4800lm Dimension: 1500*70*61mm LED Q'ty: 312pcs SMD2835
Unit Price (Ex-works)	PVP	PVP	PVP
Non-Dimmable	54,00 €	80,00 €	92,00 €
0/1-10V Dimmable	68,00 €	88,00 €	99,00 €
Dali Dimmable	103,00 €	129,00 €	141,00 €
UP to 130lm/w	4,60 €	6,90 €	9,60 €

Accessories (Extra cost to Optional component)

Suspending Installation		Hanging rope for Suspending Steel rope size: 1000mm 2pcs	8,00 €

Packing Information

Carton Size: Length: 600mm 750*250*180mm (6pcs/ctn) N.W. (CTN) 0,8 kg	Carton Size: Length: 1200mm 1350*250*180mm (6pcs/ctn) N.W. (CTN) 1,3 kg	Carton Size: Length: 1500mm 1650*250*180mm (6pcs/ctn) N.W. (CTN) 2 kg

Gauls
IP68 Tubular Light

Chemical / UV resistance
S304 / S316 Components
Linkable installation
L80B10(Ta=25°C)>50,000hrs

SL-P68X2-20-X

20 Watts 600*Ø100mm/2Ft

120~130lm/w	2400~2600lm
130~140lm/w	2600~2800lm

SL-P68X2-30-X

30 Watts 600*Ø100mm/2Ft

120~130lm/w	3600~3900lm
130~140lm/w	3900~4200lm

SL-P68X4-40-X

40 Watts 1200*Ø100mm/4Ft

120~130lm/w	4800~5200lm
130~140lm/w	5200~5600lm

SL-P68X4-50-X

50 Watts 1200*Ø100mm/4Ft

120~130lm/w	6000~6500lm
130~140lm/w	6500~7000lm

SL-P68X5-50-X

50 Watts 1500*Ø100mm/5Ft

120~130lm/w	6000~6500lm
130~140lm/w	6500~7000lm

SL-P68X5-60-X

60 Watts 1500*Ø100mm/5Ft

120~130lm/w	7200~7800lm
130~140lm/w	7800~8400lm

SAA GS LISTED CE RoHS

Quotation Sheet - Gauls IP68 Tri-proof Light for EU&AU

Features and Advantages:

* TUV,CE, RoHS, ERP, SAA Certified
* IP68 waterproof, IK10 approved
* No dark area, no sulfur seal, anti-yellow, non-cracking
* Material: Full PC housing (Frosted&Striped cover option) with S304 clips
* High Efficacy: 120lm/w ±5%, up to 140lm/w
* High CRI: Ra>80, SDCM<4
* ENEC certifed flicker free driver
* Input Voltage: AC200-240V 50/60Hz
* High Power factor: >0.95
* Retrofit to 2*18W, 2*36W, 2*58W fluo fitting
* L80B10(Ta=25°C)>50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending & Ceiling mounted for convenient installation and maintenance
* Application: Parking place / Warehouse / Railway Station / Corridor / Gas station / Car washing

Item Number	SL-P68X2-20-X	SL-P68X2-30-X	SL-P68X4-40-X	SL-P68X4-50-X	SL-P68X5-50-X	SL-P68X5-60-X
Description	0.6m 20watts, 2400~2600lm Dimension: 610x xØ100mm LED Q'ty: 182pcs SMD2835	0.6m 30watts, 3600~3900lm Dimension: 610xØ100mm LED Q'ty: 182pcs SMD2835	1.2m 40watts, 4800~5200lm Dimension: 1200xØ100mm LED Q'ty: 312pcs SMD2835	1.2m 50watts, 6000~6500lm Dimension: 1200xØ100mm LED Q'ty: 312pcs SMD2835	1.5m 50watts, 6000~6500lm Dimension: 1500xØ100mm LED Q'ty: 364pcs SMD2835	1.5m 60watts, 7200~7800lm Dimension: 1500xØ100mm LED Q'ty: 364pcs SMD2835
Unit Price (Ex-works)	PVP	PVP	PVP	PVP	PVP	PVP
Non-Dim	99,00 €	103,00 €	144,00 €	150,00 €	168,00 €	176,00 €
0/1-10V Dim	111,00 €	115,00 €	156,00 €	162,00 €	180,00 €	188,00 €
Dali Dim	146,00 €	150,00 €	199,00 €	205,00 €	219,00 €	235,00 €
Microwave Sensor (On/Off)	147,00 €	150,00 €	195,00 €	201,00 €	220,00 €	227,00 €
Microwave Sensor (Dim 10%~50%)	178,00 €	182,00 €	227,00 €	233,00 €	250,00 €	258,00 €
Emergency Battery (3hrs)	146,00 €	150,00 €	211,00 €	234,00 €	251,00 €	258,00 €
Osram Driver (Non-Dim)	123,00 €	127,00 €	172,00 €	178,00 €	195,00 €	203,00 €
Osram Driver (DALI Dim)	189,00 €	193,00 €	258,00 €	244,00 €	274,00 €	270,00 €
Meanwell Driver (Non-Dim)e	158,00 €	162,00 €	207,00 €	213,00 €	227,00 €	238,00 €
UP to 140lm/w	4,60 €	4,60 €	10,00 €	11,00 €	12,00 €	12,00 €

Accessories (Extra cost to Optional component)

Hanging rope for Suspending

Steel rope size: 1000mm

6€

With 3 pin quick connector

(Used for linkable)

9€

Up to 5 pin quick connector

(Used for dimmable linkable)

16€

Packing Information

Carton Size: Length: 600mm 740*230*330mm (6pcs/ctn)	Carton Size: Length: 1200mm 1350*230*330mm (6pcs/ctn)	Carton Size: Length: 1500mm 1650*230*330mm (6pcs/ctn)
N.W. (CTN) 1,3kg	N.W. (CTN) 2,2kg	N.W. (CTN) 2,7kg

Rancher

LED Poultry Light

SL-P69X2-20-X PC/PE		SL-P69X2-30-X PC		SL-P69X4-36-X PC/PE		SL-P69X4-50-X PC	
20 Watts 600*Ø75mm/2Ft		30 Watts 600*Ø75mm/2Ft		36 Watts 1200*Ø75mm/4Ft		50 Watts 1200*Ø75mm/4Ft	
140~150lm/w	2400≈2600lm	140~150lm/w	3600≈3900lm	140~150lm/w	4300≈4700lm	140~150lm/w	6000≈6500lm
150≈160lm/w	2600≈2800lm	150≈160lm/w	3900≈4200lm	150≈160lm/w	4600≈5000lm	150≈160lm/w	6500≈7000lm

SL-P69X5-45-X PC/PE		SL-P69X5-50-X PC		SL-P69X5-60-X PC	
45 Watts 1500*Ø75mm/5Ft		50 Watts 1500*Ø75mm/5Ft		60 Watts 1500*Ø75mm/5Ft	
140~150lm/w	5400≈5800lm	140~150lm/w	6000≈6500lm	140~150lm/w	7200≈7800lm
150≈160lm/w	5800≈6300lm	150≈160lm/w	6500≈7000lm	150≈160lm/w	7800≈8400lm

Quotation Sheet - Rancher IP69K Tri-proof Light for EU&AU

Features and Advantages:

* ENEC, SAA, CE, RoHS, ERP, D-Mark Certified
* IP69K, IK10 approved, 94V0 materials
* Anti-corrosion & Anti-UV, 850^{0}C glow wire test,
* Material: Full PC/PMMA housing (Frosted&Clear cover optional)
* With Aluminum Rebreather
* High Efficacy: 120lm/w ±5%, up to 160lm/w
* ENEC Certifed flicker free driver, THD<15%
* Input Voltage: AC200-240V 50/60Hz
* High Power factor: >0.95
* High CRI: Ra>80, SDCM<4
* Linkable, SS316 components
* L80B10(Ta=25^{0}C)>50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending & Ceiling mounted for convenient installation and maintenance
* Application: Parking place / Food & Meat prosession industry / Chicken sheds / Livestock farm

Item Number	SL-P69X2-20-X (PC & PMMA)	SL-P69X4-36-X (PC & PMMA)	SL-P69X5-45-X (PC & PMMA)	SL-P69X2-30-X (PC Only)	SL-P69X4-50-X (PC Only)	SL-P69X5-50-X (PC Only)	SL-P69X5-60-X (PC Only)
Description	0.6m 20watts, 2400~2600lm Dimensions: 600xØ75mm LED Q'ty: 208pcs SMD2835	1.2m 36watts, 4300~4700lm Dimensions: 1200xØ75mm LED Q'ty: 312pcs SMD2835	1.5m 45watts, 5400~5900lm Dimensions: 1500xØ75mm LED Q'ty: 416pcs SMD2835	0.6m 30watts, 3600~3900lm Dimensions: 600xØ75mm LED Q'ty: 208pcs SMD2835	1.2m 50watts, 6000~6500lm Dimensions: 1200xØ75mm LED Q'ty: 312pcs SMD2835	1.5m 50watts, 6000~6500lm Dimensions: 1500xØ75mm LED Q'ty: 416pcs SMD2835	1.5m 60watts, 7200~7800lm Dimensions: 1500xØ75mm LED Q'ty: 416pcs SMD2835
Unit Price (Ex-works)	PVP	PVP	PVP	PVP	PVP	PVP	PVP
Non-Dim	106,00 €	149,00 €	174,00 €	110,00 €	157,00 €	179,00 €	183,00 €
0/1-10V Dim	115,00 €	157,00 €	183,00 €	119,00 €	166,00 €	187,00 €	191,00 €
Dali Dim	145,00 €	195,00 €	227,00 €	161,00 €	223,00 €	244,00 €	249,00 €
Osram Driver (Non-Dim)	119,00 €	161,00 €	195,00 €	136,00 €	191,00 €	213,00 €	217,00 €
Osram Driver (DALI Dim)	191,00 €	242,00 €	268,00 €	208,00 €	264,00 €	285,00 €	289,00 €
Philips Driver (Non-Dim)	145,00 €	187,00 €	212,00 €	161,00 €	208,00 €	230,00 €	234,00 €
Emergency Bettery (3hrs)	183,00 €	225,00 €	251,00 €	200,00 €	246,00 €	268,00 €	272,00 €
Microwave Sensor Dim	153,00 €	200,00 €	221,00 €	170,00 €	217,00 €	238,00 €	247,00 €
Double Side Wiring (3-Pin)	5,00 €	5,00 €	5,00 €	5,00 €	5,00 €	5,00 €	5,00 €
UP to 140~160lm/w	5,00 €	7,50 €	10,00 €	5,00 €	7,50 €	10,00 €	10,00 €

Accessories (Extra cost to Optional component)

1 Meter Hanging rope (Used for Suspending)

6€/set

Up to 5 pin quick connector (Used for dimmable linkable)

18€/set

Hanging rope up to S316 (Used for Suspending)

10€/set (MOQ: 1000set)

End cap and Clips Up to S316 stainless steel

5€/set (MOQ: 1000pcs)

Connector up to S316 stainless steel

18€/pcs (MOQ: 1000pcs)

S316 stainless steel assemblies

16€/set (MOQ: 500set)

Packing Information

Carton Size: Length: 600mm 750*250*180mm (6pcs/ctn)	Carton Size: Length: 1200mm 1350*250*180mm (6pcs/ctn)	Carton Size: Length: 1500mm 1650*250*180mm (6pcs/ctn)
N.W. (CTN) 1,2kg	N.W. (CTN) 2kg	N.W. (CTN) 2,5kg

K-Lens

Linkable Linear Light

Instant-Seamless connection
Replaceable driver easily
Asymmetric & Symmetric lens



SL-A65X2-20-X

20 Watts 584*69*47mm/2Ft
120~130lm/w 2400~2600lm

SL-A40X4-36-X

36 Watts 1166*69*47mm/4Ft
120~130lm/w 4300~4700lm

SL-A40X5-45-X

45 Watts 1457*69*47mm/5Ft
120~130lm/w 5400~5900lm

CE RoHS

Quotation Sheet - K-lens Linkable Linear Light for EU&AU

Features and Advantages:

* CE, RoHS Certified
* IP40, IK09 approved
* Instant seamless connection
* Beam Angle: 45°/ 90°, beam angle optional
* Material: Aluminum housing + Asymmetric & Symmetric lens + S304 clips
* High Efficacy: 130lm/w ±5%
* High CRI: Ra>80, SDCM<4
* Flicker free internal driver
* Input Voltage: AC200-240V 50/60Hz
* High Power factor: >0.95
* L80B10(Ta=25°C)>50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending & Ceiling mounted for convenient installation and maintenance
* Application: Office/Supermarket/Shopping mall/Workshop/Aiport/Warehouse etc.

Item Number	SL-A40X2-20-X	SL-A40X4-36-X	SL-A40X5-45-X
Description	0.6m 20watts, 2600~2800lm Dimensions: 584*47*69mm LED Q'ty: 66pcs SMD2835	1.2m 36watts, 4680~5000lm Dimensions: 1166*47*69mm LED Q'ty: 132pcs SMD2835	1.5m 45watts, 5800~6300lm Dimensions: 1457*47*69mm LED Q'ty: 165pcs SMD2835
Unit Price (Ex-works)	PVP	PVP	PVP
Non-Dim (90° Clear Lens)	98,00 €	135,00 €	162,00 €
Non-Dim (45° Frosted Lens)	104,00 €	145,00 €	175,00 €
0/1-10V Dim	16,00 €	16,00 €	16,00 €
Dali Dim	32,00 €	32,00 €	32,00 €

Accessories (Extra cost to Optional component)

Suspending Installation		Hanging rope for Suspending Steel rope Dimensions: 1000mm 2pcs	8€/set

Packing Information

Carton Size: Length: 600mm 660*235*180mm (9pcs/ctn) N.W. (CTN) 8kg	Carton Size: Length: 1200mm 1210*235*180mm (9pcs/ctn) N.W. (CTN) 17,5kg	Carton Size: Length: 1500mm 1500*235*180mm (9pcs/ctn) N.W. (CTN) 21,5kg

SL-8880U-06-3X

6+14Watts 600*80*63mm/2Ft

130lm/w 780+1820lm

SL-8880U-09-3X

9+21Watts 900*80*63mm/3Ft

130lm/w 1170+2730lm

SL-8880U-12-3X

12+28Watts 1200*80*63mm/4Ft

130lm/w 1560+3640lm

SL-8880U-15-3X

18+42Watts 1500*80*63mm/5Ft

130lm/w 2340+5460lm

SL-8880U-18-3X

24+56Watts 1800*80*63mm/6Ft

130lm/w 3120+7280lm

SL-8880U-24-3X

30+70Watts 2400*80*63mm/8Ft

130lm/w 3900+9100lm

CE RoHS

Quotation Sheet - LED Linear Light for EU&AU

Features and Advantages:

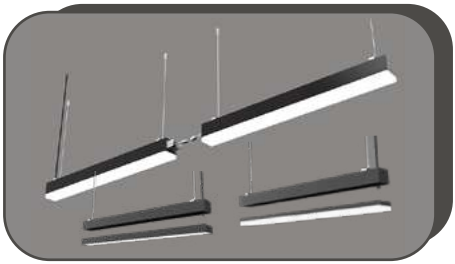

* CE, RoHS Standard, IP40, IK09 approved
* Light Direction: Light up and down / Light down
* Instant seamless connection
* Large Beam Angle: R=180°/ P=120°
* Housing: Aluminum (Black/White/Silver color optional)
* Cover: Radian Frosted PC/Plane Frosted PC etc.
* High Efficacy: 110lm/w ±5%
* High CRI: Ra>80, SDCM<4
* Input Voltage: AC200-240V 50/60Hz
* Flicker free internal driver, Power factor: >0.95
* L80B10(Ta=25°C)>50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending & Ceiling mounted for convenient installation and maintenance
* Application: Office/Supermarket/Shopping mall/Workshop/Aiport/Warehouse etc.

Item Number	SL-LIAR(P)2-020	SL-LIAR(P)-030	SL-LIAR(P)4-040	SL-LIAR(P)5-060	SL-LIAR(P)6-080	SL-LIAR(P)8-100
Description	0.6m 20watts, 2000~2400lm Light down: 20 watts, 130pcs 2835#SMD Light up and down: 6+14 watts, 195pcs 2835#SMD Dimensions: 600*63*80mm	0.9m 30watts, 3000~3600lm Light down: 30 watts, 182pcs 2835#SMD Light up and down: 9+21watts, 260pcs 2835#SMD Dimensions: 900*63*80mm	1.2m 40watts, 4000~4800lm Light down: 40 watts, 234pcs 2835#SMD Light up and down: 12+28watts, 338pcs 2835#SMD Dimensions: 1200*63*80mm	1.5m 60watts, 6000~7200lm Light down: 60 watts, 3 64pcs 2835#SMD Light up and down: 18+42 watts, 520pcs 2835#SMD Dimensions: 1500*63*80mm	1.8m 80watts, 8000~9600lm Light down: 80 watts, 468pcs 2835#SMD Light up and down: 24+56watts, 598pcs 2835#SMD Dimensions: 1800*63*80mm	2.4m 100watts, 10000~12000lm Light down: 100 watts, 598pcs 2835#SMD Light up and down: 30+70watts, 797pcs 2835#SMD Dimensions: 2400*63*80mm
Unit Price (Ex-works)	PVP	PVP	PVP	PVP	PVP	PVP
Light Down Non-dim	106,00 €	129,00 €	151,00 €	188,00 €	235,00 €	294,00 €
Light Up and Down Non-dim	111,00 €	140,00 €	167,00 €	210,00 €	261,00 €	326,00 €
Light Down Dali dim	167,00 €	190,00 €	219,00 €	264,00 €	298,00 €	331,00 €
Light Up and Down Dali dim	175,00 €	201,00 €	234,00 €	286,00 €	318,00 €	367,00 €

Accessories (Extra cost to Optional component)

Suspending Installation

Hanging rope for Suspending
Steel rope Dimensions: 1500mm
2pcs

8€/set

Packing Information

Carton Size: Length: 600mm 645*220*195mm (6pcs/ctn) N.W. (CTN) 15,5 kg	Carton Size: Length: 900mm 945*220*195mm (6pcs/ctn) N.W. (CTN) 22 kg	Carton Size: Length: 1200mm 1245*220*195mm (6pcs/ctn) N.W. (CTN) 29 kg
Carton Size: Length: 1500mm 1545*220*195mm (6pcs/ctn) N.W. (CTN) 36 kg	Carton Size: Length: 1800mm 1845*220*195mm (6pcs/ctn) N.W. (CTN) 40 kg	Carton Size: Length: 2400mm 2445*220*195mm (6pcs/ctn) N.W. (CTN) 56 kg

SL-A65X2-20-X

20 Watts 600*94*69mm

140~150lm/w	2800~3000lm
150~160lm/w	3000~3200lm

SL-A65X4-50-X

50 Watts 1200*94*69mm

140~150lm/w	7000~7500lm
150~160lm/w	7500~8000lm

SL-A65X2-30-X

30 Watts 600*94*69mm

140~150lm/w	4200~4500lm
150~160lm/w	4500~4800lm

SL-A65X5-50-X

50 Watts 1500*94*69mm

140~150lm/w	7000~7500lm
150~160lm/w	7500~8000lm

SL-A65X4-40-X

40 Watts 1200*94*69mm

140~150lm/w	5600~6000lm
150~160lm/w	5600~6400lm

SL-A65X5-60-X

60 Watts 1500*94*69mm

140~150lm/w	8400~9000lm
150~160lm/w	9000~9600lm

Quotation Sheet - Parkade AL Tri-proof Light for EU&AU

Features and Advantages:

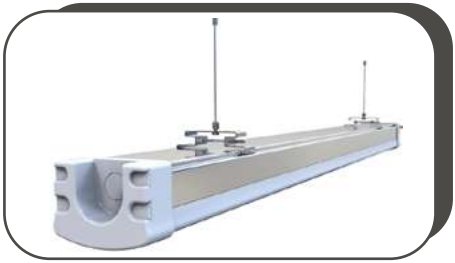

* TUV, SAA, CE, RoHS, ERP Certified
* IP66, IK10 approved, 94V0 materials
* No dark area, No sulfur seal, Anti-yellow, Non-cracking
* Material: Aluminum casing + PC cover
  (Frosted&Striped cover option) with S304 clips
* High Efficacy: 120lm/w ±5%, up to 160lm/w
* High CRI: Ra>80, SDCM<4
* ENEC Certifed flicker free driver, THD<15%
* Input Voltage: AC200-240V 50/60Hz
* High Power factor: >0.95
* Linkable / Tool free
* L80B10(Ta=25°C)>50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending & Ceiling mounted for convenient installation and maintenance
* Application: Parking place / Warehouse / Railway Station / Corridor / Gallery

Item Number	SL-A65X2-20-X	SL-A65X2-30-X	SL-A65X4-40-X	SL-A65X4-50-X	SL-A65X5-50-X	SL-A65X5-60-X
Description	0.6m 20watts, 2200~2600lm Dimensions: 600*94*69mm LED Q'ty: 156pcs SMD2835	0.6m 30watts, 3300~3900lm Dimensions: 600*94*69mm LED Q'ty: 208pcs SMD2835	1.2m 40watts, 4800~5200lm Dimensions: 1200*94*69mm LED Q'ty: 260pcs SMD2835	1.2m 50watts, 6000~6500lm Dimensions: 1200*94*69mm LED Q'ty: 312pcs SMD2835	1.5m 50watts, 6000~6500lm Dimensions: 1500*94*69mm LED Q'ty: 312pcs SMD2835	1.5mm 60watts, 7200~7800lm Dimensions: 1500*94*69mm LED Q'ty: 416pcs SMD2835
Unit Price (Ex-works)	PVP	PVP	PVP	PVP	PVP	PVP
Non-Dim	86,00 €	90,00 €	113,00 €	135,00 €	150,00 €	157,00 €
0/1-10V Dim	97,00 €	101,00 €	129,00 €	141,00 €	156,00 €	168,00 €
Dali Dim	139,00 €	141,00 €	168,00 €	193,00 €	209,00 €	215,00 €
Microwave Sensor	137,00 €	141,00 €	164,00 €	186,00 €	201,00 €	207,00 €
Microwave Sensor Dim	168,00 €	172,00 €	199,00 €	211,00 €	227,00 €	238,00 €
Emergency Battery (3hrs)	137,00 €	141,00 €	180,00 €	217,00 €	233,00 €	239,00 €
Osram Driver (Non-Dim)	113,00 €	117,00 €	141,00 €	162,00 €	178,00 €	184,00 €
Osram Driver (DALI Dim)	180,00 €	184,00 €	215,00 €	229,00 €	244,00 €	250,00 €
Meanwell Driver (Non-Dim)	148,00 €	152,00 €	176,00 €	193,00 €	209,00 €	213,00 €
UP to 140~160lm/w	4,00 €	6,00 €	6,00 €	6,00 €	6,00 €	6,00 €

Accessories (Extra cost to Optional component)

						
1 Meter Hanging rope (For suspending)	Detachable end cap (For linkable with screws)	Rotatable buckle (201#stainless steel)	IK10 metal connector	5pin quick connector (For dimmable linkable)	3pin quick connector (For linkable)	Detachable end cap (For linkable tool free)
€8/set	€8/set	€8/set	€4/Unit	€8/pc($4/2pcs)	€4/pc($2/2pcs)	€8/set

Packing Information

Carton Size: Length: 600mm 660*260*220mm (6pcs/ctn)	Carton Size: Length: 1200mm 1260*260*220mm (6pcs/ctn)	Carton Size: Length: 1500mm 1560*260*220mm (6pcs/ctn)
N.W. (CTN) 9 kg	N.W. (CTN) 14 kg	N.W. (CTN) 17 kg

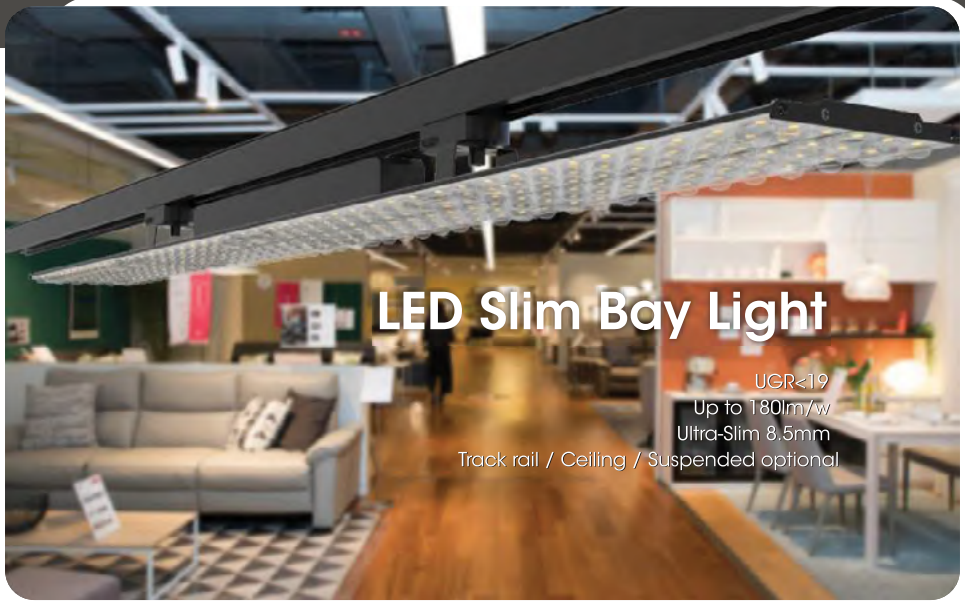

LED Slim Bay Light

UGR<19
Up to 180lm/w
Ultra-Slim 8.5mm
Track rail / Ceiling / Suspended optional

SL■B40X2■40■X

40 Watts 600mm
145lm/w±5% 5800lm±5%

SL■B40X4■60■X

60 Watts 1200mm
145lm/w±5% 8700lm±5%

SL■B40X5■75■X

75 Watts 1500mm
145lm/w±5% 10850lm±5%

Quotation Sheet - LED Slim Bay Light

Features and Advantages:

* Ultra Slim Design 8.5mm, UGR less 19
* Beam Angle: 2*45° lens
* High CRI: Ra>80, SDCM<4
* High Efficacy: 145lm/w ±5%, up to 180lm/w
* High Power factor: >0.95
* Flicker free driver, THD<15%
* Input Voltage: AC200-240V 50/60Hz
* Material: Black color Aluminium+lens (White color for options)
* L80B10 Lifespan(Ta=25°C):50,000hrs, Warranty: 5 years
* CCT: 3000K: 3045±175K, 4000K: 3985±275K, 5000K: 5029±283K, 6000K: 6065±415K
* Suspending&Ceiling mounted&Trackway for convenient installation and maintenance
* Application: Supermarket / Store / Warehouse / Library / Museum / Exhibition / Office / Hotel

Item Number	SL-B40X2-40-X	SL-B40X4-60-X	SL-B40X5-75-X
Description	0.6m 40watts, 5800lm ±5% Dimension: 584*125*13mm LED Q'ty: 132pcs SMD2835	1.2m 60watts, 8700lm ±5% Dimension:1164*125*13mm LED Q'ty: 264pcs SMD2835	1.5m 75watts, 10850lm ±5% Dimension: 1454*125*13mm LED Q'ty: 330pcs SMD2835
Unit Price (Ex-works)	PVP	PVP	PVP
Non-Dim	135,00 €	210,00 €	262,00 €
0/1-10V Dim	145,00 €	220,00 €	271,00 €
Dali Dim	192,00 €	276,00 €	327,00 €

Accessories (Extra cost to Optional component)

Ceiling mounted Installation		Bracket for Ceiling Mounted Dimension: 60*45*1.5mm Black color	6,00 €
Suspending Installation		Hanging Rope for Suspending Steel rope dimension: 1000mm	12,00 €
Track Rail System Installation		4-Wire 3-Circuit Track Rail Track dimension: 41.8(W)*33.7(H)mm Length provided only 1M/2M/3M option	42,00 €
		4-Wire 3-Circuit Track Adapter Track adapter dimension: 70*40*32mm (1 set = 2 pcs)	18,00 €

Packing Information

Carton Size: Length: 600mm 630*350*190mm (5pcs/ctn) N.W. (CTN) 7 kg	Carton Size: Length: 1200mm 1230*350*190mm (5pcs/ctn) N.W. (CTN) 12,5 kg	Carton Size: Length: 1500mm 1530*350*190mm (5pcs/ctn) N.W. (CTN) 15,5 kg

Security Lighting

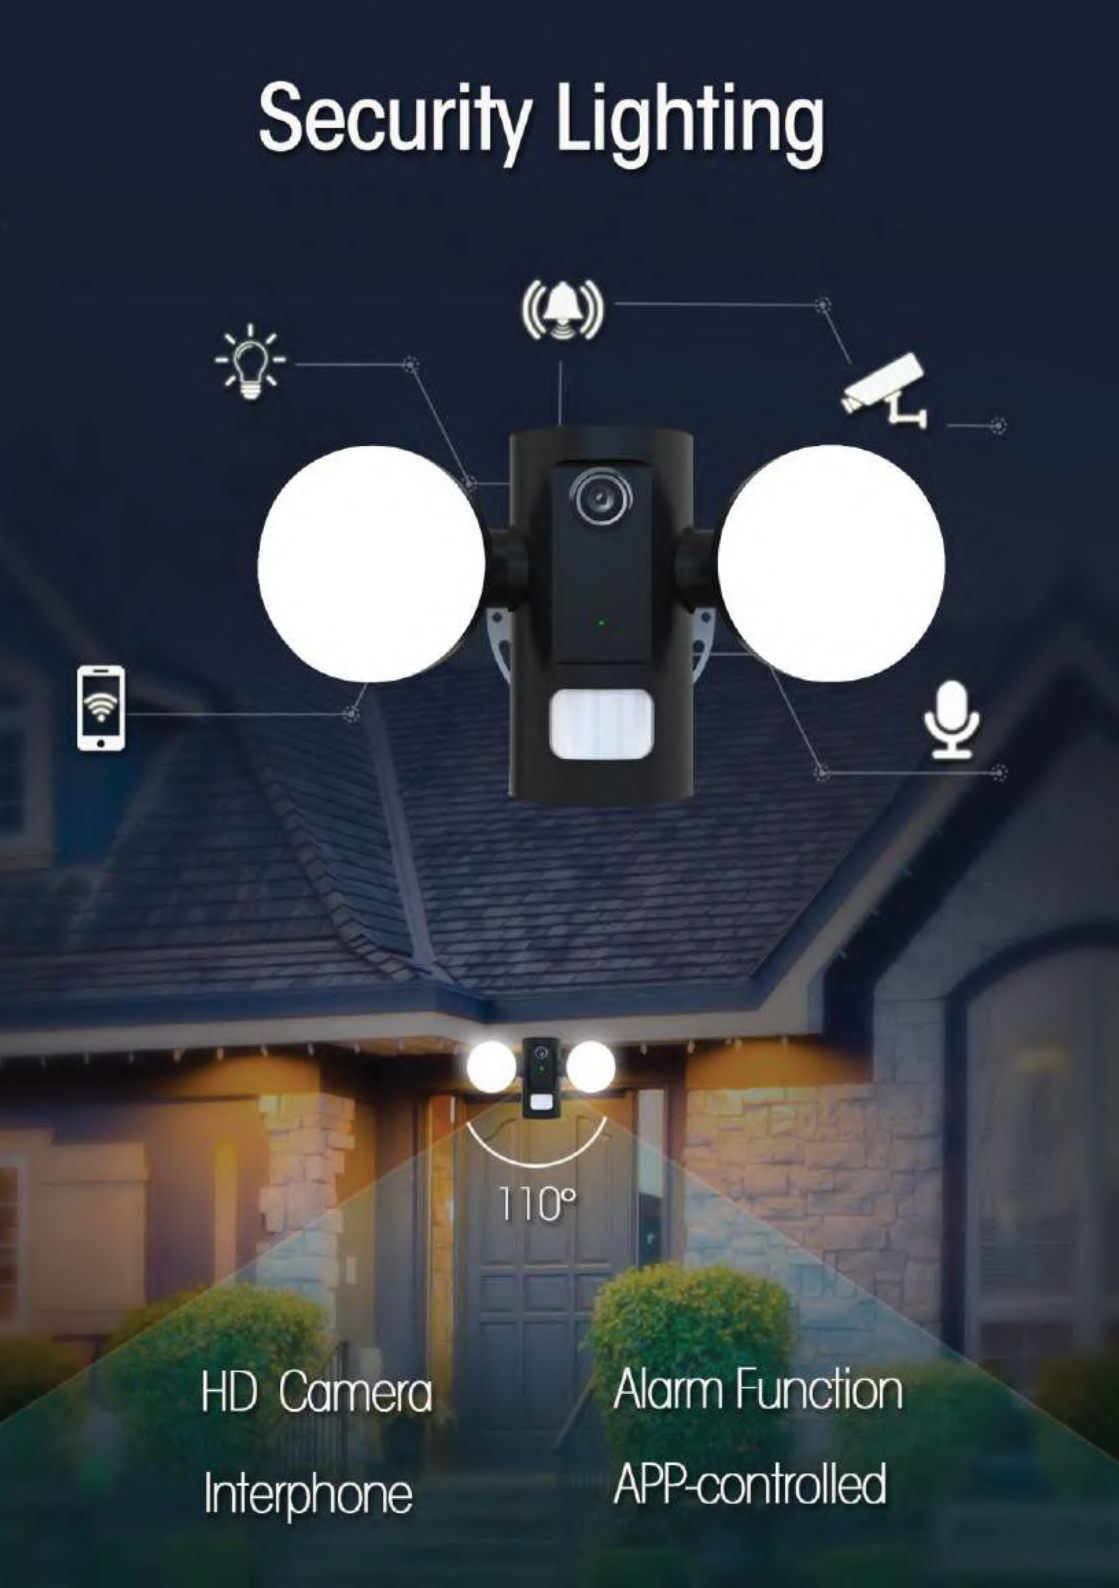

HD Camera

Interphone

Alarm Function

APP-controlled

Quotation Sheet - LED Security Light for EU

Features and Advantages:

* Patent fashion Design
* IP65 Waterproof, Wide viewing angle
* App-Controlled/HD Camera/Interphone/Alarm Function
* High-definition monitor
* The man-machine dialogue
* Intrusion SMS reminding+ buzzer alarm
* IR induction & light control
* Family sharing operation
* CCT: 5000K: 5029±283K, CRI: >80
* Material: PC Black color (White color for options)
* Input: AC200-240V, Warranty: 5 years
* Application: Office / Warehouse / Household / Museum

Item Number	SL-S1-12-X
Description	Size: 200*100*138mm Power: 12W, 1200~1300lm LED Q'ty: 50pcs SMD2835
Q'ty	PVP
Unit Price (Ex-works)	168,00 €

Packing Information	
Carton Size	830*360*230mm (10pcs/ctn)
N.W. (CTN)	4 kg
Unit Price (Ex-works)	168,00 €

Made in Feron
It's made in ShineLong

Scan me get updates